


SD Fenders

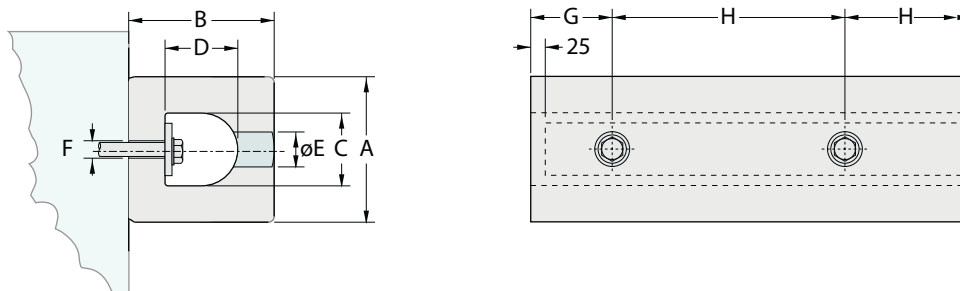

SD fender											Energy absorption	Reaction force
A	B	C	D	ØE	ØF	G	H	Flat steel	Bolt	Weight/m	kNm/m	kN/m
100	100	50	45	30	15	90-130	200-300	40 × 5	M12	10,0	2,7	136
150	150	70	65	40	20	110-150	250-300	50 × 8	M16	22,7	6,4	206
200	200	90	95	50	25	130-180	300-400	70 × 10	M20	39,8	11,3	275
250	250	120	120	60	30	140-200	350-450	90 × 12	M24	61,1	17,6	343
300	300	125	135	60	30	140-200	350-450	100 × 12	M24	92,0	25,5	412
350	350	175	180	75	35	140-200	350-450	130 × 15	M30	118	34,3	471
400	400	200	200	75	35	140-200	350-450	150 × 15	M30	153	45,2	589
500	500	250	250	90	45	160-230	400-500	180 × 20	M36	239	70,7	736

Units (mm, kg)

Values stated by 50 % deflection

